

X10 Mini & Hidden Curtain Motor User Manual

Please read this manual carefully before using the product!

Edition: 1.0

Cautions




No entry into water



Do not disassemble



Do not plug in before completing installation



After installation, do not forcefully pull the curtain




Do not strike, collide and fall



Use after firmly installing


Functions

Soft start(Cancelable)+stop when blocking + electric stroke +slow start and stop + overtime protection+ remote control + reset + reverse setting +speed regulation + dry contact (optional)+Tuya/Smartlife control(optional)



Rated voltage: AC90-240V 50/60Hz
Working temp: -5°C~45°C
Rated Power: 18W
Rated torque: 1.5N·m
Noise: <35dB
Speed: 14cm/S
Overtime protection: 4min
Protection grade: IP41
Insulation class: E
Remote: 433.92Mhz
Zigbee: 2.4GHz
APP: Tuya smart/Smartlife

Power wiring



AC Power cable

Note:

- Make sure the connection between power cable and socket is tight;
- Select a plug style that is suitable to your local power socket.

Module plug-in design



Standard interface and specifications



Easy to switch to other modules



Hot-swap and Fast plug-in



Secondary development and customization

Settings

Enter the setting state



Long press the setting button for 3 seconds



Release the button when the indicator is bright



Done



The setting state goes out within 10 seconds if there is no other operation !

Learn code



The motor is in setting state



Click the up button on the remote once



Done

Reverse Settings



The motor is in setting state



Click the setting button once



Done



Click the down button once



Done



● It is effective only when the the remote in use has been learned!

● The working direction of all the controls will be reversed after setting!

Soft start



The motor is in setting state



Click the middle button once



Done



It is effective only when the the remote in use has been learned!

Motor networking



Quickly click the setting button for 3 times



Add devices through apps or smart speaker



Done

Speed setting



Quickly click the setting button for 4 times



Click the setting button, the flash times of indicator shows the speed levels



Done



● The indicator goes out in 6 seconds automatically if there are no more operations.

● 3 levels are settable.

● Default speed level is 2.

Reset (Clear Code)



The motor is in setting state



Long press the setting button for 3 seconds



3 seconds



Done

Smartlife (Wi-Fi)




Optional function

Control by Google assistant or Amazon Alexa after bounding the ID with Google or Alexa.



Scan and get Smartlife

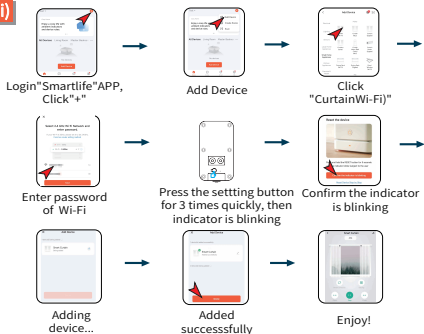

Smartlife (Zigbee)



Optional function

● Make sure the Zigbee gateway has added in the APP.

● Control by Google assistant or Amazon Alexa after bounding the ID with google or Alexa.

